



MOUNTING HOLE PATTERN IN BASE PLATE. STEEL PLATE ALSO SUITABLE FOR WELDING TO MACHINE.

REV.	DESCRIPTION	DATE
- JCH	ORIGINAL RELEASE	05-11-01

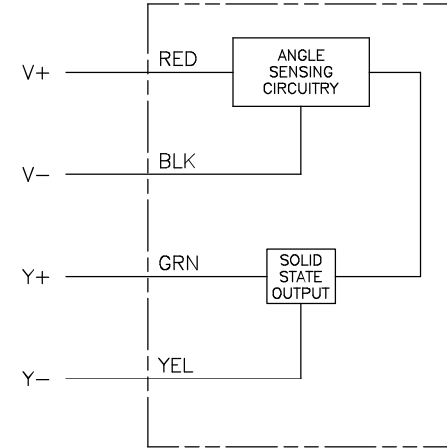

**EQUIVALENT OUTPUT**

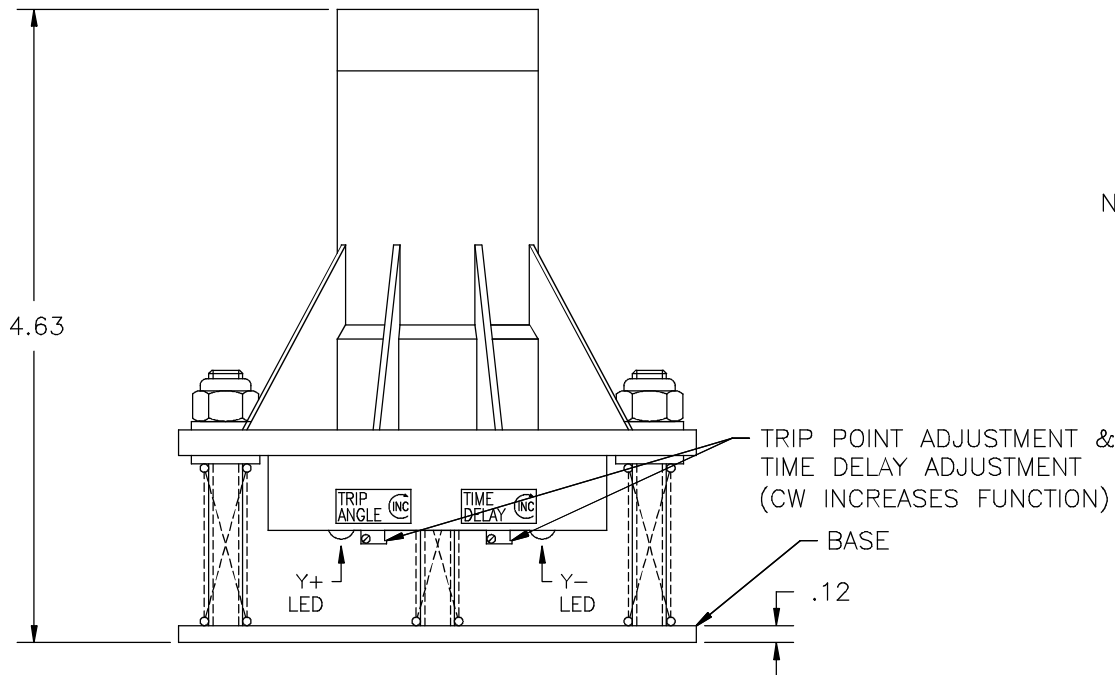

- NOTES: 1) VOLTAGE SUPPLY IS TO BE 10-60VDC.  
 2) OUTPUT: 1.2AMPS CONTINUOUS @ VS.  
 3) FINAL TEST AND CALIBRATION PER #A-11745.  
 REF: TRIP ANGLE IS FIELD ADJUSTABLE FROM 0.5 TO 3.0 DEGREES. FACTORY PRESET TO 1.0 DEGREES.  
 TIME DELAY IS FIELD ADJUSTABLE FROM 0 TO 3 SECONDS. FACTORY PRESET TO 1.0 SECONDS.  
 4) NEXT LOWER ASSEMBLY #C-11770.

**WARNING:** P-Q Controls, Inc. products are intended as general purpose switches. They are NOT safety devices and as with any general purpose devices, malfunctions may occur. If P-Q products are used to initiate an operation where false operation could be dangerous, POINT-OF-OPERATION GUARDING DEVICES must be installed and maintained to meet all appropriate OSHA and ANSI machine safety standards. P-Q Controls, Inc. shall not accept responsibility for installation, application or safety of systems.



P-Q Controls, Inc.  
95 Dolphin Rd.  
Bristol, CT 06010  
PHONE: (860) 583-6994  
FAX: (860) 583-6011

DWG. NO.	REV.
B-11848	-
SHEET	SCALE
	1:1

M410-10-10 INSTALLATION DWG  
PLATFORM LEVELER, N.O. ADJ TRIP & TIME DELAY

DRAFTSMAN	CHECK	PROJECT ENGINEER	DATE
JCH			05-11-01