

PORTABLE GAS ANALYSER | ANAEROBIC DIGESTION

Easy to use, calibrate and configure and enables consistent collection of data for improved analysis and accurate reporting, whilst helping to check the digester process is running efficiently.



SECTOR



APPLICATIONS

- Farm digester gas monitoring
- Food processing biogas monitoring
- Waste water biogas monitoring
- Methane recovery

FEATURES

- Certified: ATEX, IECEx, CSA, MCERTS and UKAS calibration (ISO17025)
- Robust design for market leading reliability
- CH₄ and CO₂ accuracy ± 0.5% after calibration
- Choice of user settings and simple gas reading function
- Measures % CH₄, CO₂ and O₂
- Modular and upgradeable
- 3 year warranty
- Stores and downloads readings
- User selected languages
- Event log
- Datalogging and profiling function
- Up to 6 gases monitored

BENEFITS

- Enables consistent collection of data for improved analysis and accurate reporting
- No need for self-certification of anemometer
- Easy to use and calibrate
- User configurable operation
- Helps check digester process is running efficiently

OPTIONS (AVAILABLE AT PURCHASE OR LATER)

- H₂S to 0-5,000ppm or 0-10,000ppm
- Additional gases including H₂ and NH₃
- Gas Analyser Manager software for data download
- External flow devices: anemometer (ATEX) / Pitot tubes
- ATEX certified temperature probe



© Product designs and specifications are subject to change without notice. User is responsible for determining suitability of product.

TECHNICAL SPECIFICATIONS

POWER SUPPLY				
Battery type	Rechargeable nickel metal hydride battery pack (not user replaceable)			
Battery life	Typical use 8 hours from fully charged			
Battery charger	Separate intelligent battery charger powered from mains supply (100- 240V)			
Charge time	Approximately 4 hours from complete discharge			
GAS RANGES				
Gases measured	CH ₄ and CO ₂	By dual wavelength infrared sensor with reference channel		
	O ₂	By internal electrochemical cell		
	H ₂ S/H ₂ /CO/NH ₃	By internal electrochemical cell		
Standard gas cells	Cell	Range	Typical accuracy (range : accuracy)	Typical accuracy (range : accuracy)
	CH ₄	0-100%	0-70% : ±0.5% (vol)	70-100% : ±1.5% (vol)
	CO ₂	0-100%	0-60% : ±0.5% (vol)	60-100% : ±1.5% (vol)
	O ₂	0-25%	0-25% : ±1.0% (vol)	
Optional gas cells	Cell	Range	Typical accuracy	
	H ₂ S	0-50ppm	±1.5% FS	
	H ₂ S	0-200ppm	±2.0% FS	
	H ₂ S	0-500ppm	±2.0% FS	
	H ₂ S	0-1,000ppm	±2.0% FS	
	H ₂ S	0-5,000ppm	±2.0% FS	
	H ₂ S	0-10,000ppm	±5.0% FS	
	CO	0-500ppm	±2.0% FS	
	CO	0-1,000ppm	±2.0% FS	
	CO	0-2,000ppm	±2.0% FS	
	CO (H ₂)*	0-2,000ppm	±1.0% FS	
	NH ₃	0-1,000ppm	±10.0% FS	
	H ₂	0-1,000ppm	±2.5% FS	
Typical accuracies	All typical accuracies quoted are after calibration			
*Hydrogen compensated carbon monoxide measurement	Hydrogen cross gas effect on carbon monoxide approximately 1%. Do not use where hydrogen is in excess of 10,000 ppm.			
Response time, T90	CH ₄	≤10 seconds		
	CO ₂	≤10 seconds		
	O ₂	≤20 seconds		
	H ₂ S	≤30 seconds		
	CO	≤30 seconds		
	NH ₃	≤90 seconds		
	H ₂	<90 seconds		


© Product designs and specifications are subject to change without notice. User is responsible for determining suitability of product.

PUMP	
Flow	550 ml/min typically
Flow fail point	-200 mbar vacuum- user settable
Maximum vacuum restart	-250 mbar approximately with flow rate of approx 250ml/min
FACILITIES	
Temperature measurement	-10°C to +75°C with optional probe
Temperature accuracy	±0.5°C with optional probe
Flow measurement	Via Pitot tube, orifice plate, or anemometer
Alarm	User selectable alarms
Communications	Via USB lead or wireless Bluetooth**
Relative pressure measurement	±250 mbar
Relative pressure accuracy	±4 mbar typically (should be zeroed before reading) to ±15 mbar max
Barometric pressure measurement	500 to 1500 mbar, ±5 mbar accuracy
Available memory	10 IDs**, 500 readings
ENVIRONMENTAL CONDITIONS	
Operating temperature range	-10°C to +50°C
Atmospheric pressure range	700 to 1200 mbar
Relative humidity	0-95% non condensing
Case seal	IP65

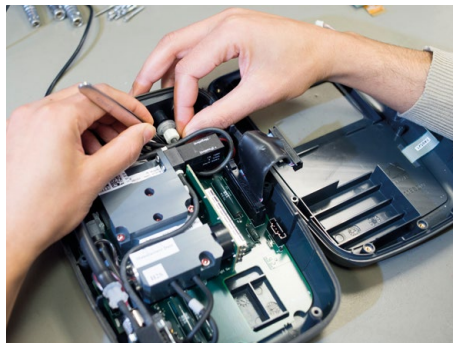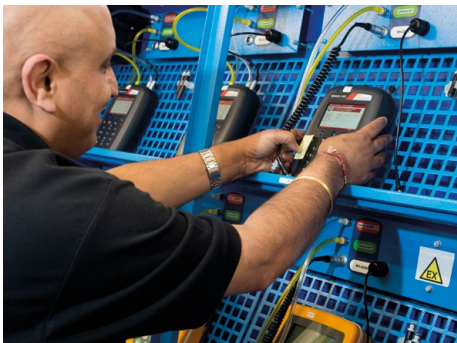

© Product designs and specifications are subject to change without notice. User is responsible for determining suitability of product.

TECHNICAL SPECIFICATIONS CONTINUED

PHYSICAL	
Weight	1.6kg
Size	L 220mm, W 155mm, D 60mm
Case material	ABS / polypropylene with rubber over-moulding
Keys	Alpha-numeric keypad with 'tactile' membrane
Display	Ultra-clear high resolution 4.3" full colour TFT
Connections	Colour coded gas inlet, outlet and pressure ports. Waterproof USB port, anemometer and charger / temperature probe connections.
Gas sample filters	External user changeable 2.0µm ptfе water traps
CERTIFICATION RATING	
ATEX MARKING	 II 2G Ex ib IIA T1 Gb (Ta = -10°C to +50°C)
MCERTS	MC/130240
ISO17025	Calibration to UKAS certificate number 4533
CSA	Ex ib IIA T1 (Ta = -10°C to +50°C) (Canada), AEx ib IIA T1 (Ta = -10°C to +50°C) (USA)
**Gas Analyser Manager software required.	
Important note: The information in this document is correct at the time of generation. We do however, reserve the right to change the specification without prior notice as a result of continuing development.	



© Product designs and specifications are subject to change without notice. User is responsible for determining suitability of product.