



IM-CT-1948-3-07-IQ 19" LED-backlit Display

FUNCTIONALITY

Enhanced gamma selection, black-level alignment, and analogue image adjustment capabilities enable the SX-Series to display an upgraded level of surveillance images captured by conventional security cameras without any extra hassle. Crafted specifically for 24/7 security and surveillance duties, they are shielded with NeoV™ Optical Glass and metal casing, and AG Neovo's Anti-Burn-In™ technology guards them against ghosting.

MAIN FEATURES


- LED-backlit technology with 1280 x 1024 / 1024 x 768 resolutions
- Anti-Burn-in™ technology prevents image ghosting
- NeoV™ Optical Glass and metal housing for excellent cleanability and protection
- VA Panel technology ensures accurate colours and offers high contrast ratios with wide viewing angles (15" only)
- Image Enhancer: 3D Comb Filter / Deinterlace / Noise Reduction / Freeze
- Versatile connectivity: DisplayPort, HDMI, DVI, VGA, Component/Composite, S-Video and RS232
- BNC passive loop-through output port
- Front-sided IP22 Compliant (IEC 60529 Standard)
- EcoSmart Sensor automatically adjusts brightness level according to ambient lighting conditions
- Flicker-free display technology reduces eye discomfort
- Quick signal-switching time (≤ 0.8 sec.)
- Black-level adjustment for presenting more details in dark images
- Gamma selection and black-level adjustment
- Selectable aspect ratio
- Built-in speakers
- Designed and developed for continuous 24/7 operation
- Premium-grade panel for high reliability and long product lifetime
- Available also in white



IM-CT-1948-3-07-IQ - SPECIFICATIONS

MAIN FEATURES

Panel Type	LCD/TFT Monitor
Panel Size	19", 48.2 cm
Max. Resolution	1280x1024
Viewing angle horizontal	170°
Viewing angle vertical	160°
Brightness typical	250 cd/m ²
Contrast ration typical	1000:1
Response Time	3 ms
Video inputs (type)	15-pin D-Sub, 24-pin DVI-D 1.0, BNC x 2, DP 1.2a, HDMI 1.4, 4-pin mini DIN
Video outputs	2x Composite (FBAS)
Audio inputs	2
Housing material	Metal
Colour (housing)	black
Control interfaces	no
Certifications	CE

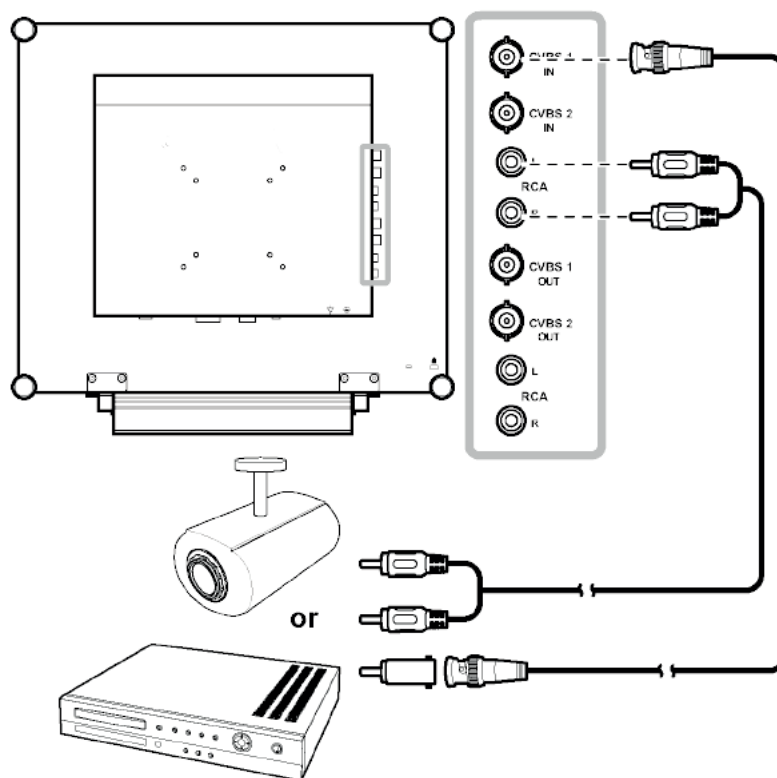

PIEPER

www.pieper-video.de

info@pieper-video.de

HQ

PIEPER GmbH
Binnerheide 33
58239 Schwerte

T: +49 2304 47010
F: +49 2304 470177

NL Düsseldorf

PIEPER GmbH
Gumbertstr. 111
40229 Düsseldorf

T: +49 211 215033
F: +49 211 215036

NL Berlin

PIEPER GmbH
Großbeerenstr. 169
12277 Berlin

T: +49 30 7225299
F: +49 30 7224487

NL Cottbus

PIEPER GmbH
Calauer Str. 70
03048 Cottbus

T: +49 355 43090340
F: +49 355 43090341

NL München

PIEPER GmbH
Weidenweg 3
84434 Kirchberg

T: +49 8706 9497797
F: +49 365 7370717

Errors excepted and possible technical alterations without notice.