

**NiCd Accus 4.5 Ah**

Nickel-Cadmium cells (NiCd)



**Product description**

- \_ High-temperature NiCd cells for use with emergency lighting unit
- \_ 4-year design life
- \_ 1-year guarantee

**Properties**

- \_ Constant high-temperature operation – depending on the emergency lighting unit used (refer to respective emergency control gear data sheet)
- \_ Good charging properties at high temperature
- \_ High energy maintenance of the charged battery
- \_ Certified quality manufacturer
- \_ In various configurations
- \_ Simple connection with blade terminal respectively plug terminal
- \_ With polycarbonate fixing caps and connecting cable
- \_ Electrical connection with mounted end caps possible
- \_ Suitable for emergency lighting equipment as per IEC 60598-2-22


**Website**

<http://www.tridonic.com/28002773>



**NiCd Accu 4.5 Ah**

Nickel-Cadmium cells (NiCd)

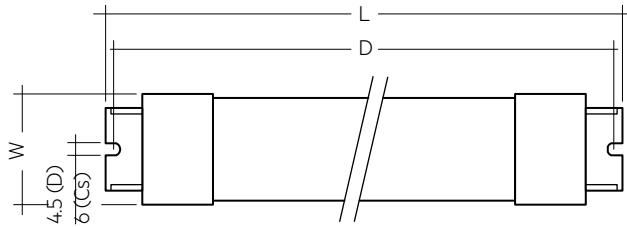

**Ordering data**

Type	Article number	Capacity	Packaging, carton	Packaging, outer box	Weight per pc.
<b>NiCd D cells – stick</b>					
Accu-NiCd 3A 55	28002773	4.5 Ah	5 pc(s).	25 pc(s).	0.424 kg

**Technical data**

Battery voltage per cell	1.2 V
Min. battery casing temp. (design life of 4 years)	+ 5 °C
Max. battery casing temp. (design life of 4 years)	Refer to emergency control gear datasheet

**Approval marks**



**Standards**

Acc. to EN 60598-2-22

**Specific technical data**

Type	Article number	Figure	Number of cells	Capacity	Length L	Hole spacing D	Width B	Height H
<b>NiCd D cells – stick</b>								
Accu-NiCd 3A 55	28002773	1	3	4.5 Ah	210 mm	198 mm	36 mm	35 mm