



**"A13BF" SERIES COSTECH FANS**

Description: **Axial fan a.c. 127x127x38mm**

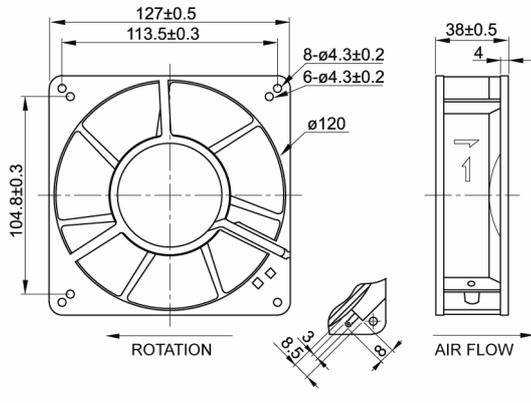

**Casing material:** Black varnished aluminum  
**Impeller material:** Black fibreglass reinforced plastic (PBT PC) UL 94V-0  
**Protection degree:** IP20, according to EN 60529 standard  
**Fixing system:** by No 4 M4 screws  
**Motor protection:** Impedance  
**Storage temperature:** from -40°C to +80°C  
**Rated temperature range:** from -40°C to +70°C  
**Lifetime L10 at 40°C:** 40,000 h  
**Electrical connection:** flat terminals 110 series (2.8x0.5 mm)  
**Approvals:** UL E223195  
**Weight:** 0.55 kg

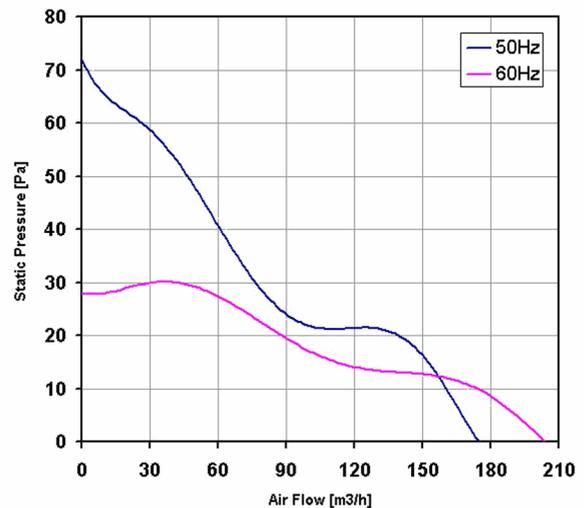

Model	Bearing	Voltage	Frequency	Rated Current	Rated Power	Max Air Flow**	Static Pressure	Noise	RPM	Approvals
		(V)	(Hz)	(A)	(W)	(m3/h)	(Pa)	[db(A)]	(rpm)	
A13B12HTBF00	Ball	115 V a.c.	50/60	0.200/0.160	17/15	174/204	72/28	46.0/50.0	2,700/3,000	CE; cURus
A13B23HTBF00	Ball	230 V a.c.	50/60	0.100/0.090	17/15	174/204	72/28	46.0/50.0	2,700/3,000	CE; cURus

All specifications, data and drawing are subject to change without notice and are approximate. Please refer to our terms of sales including our warranty and limited liabilities clauses.